



SSCN123GS9

NPN Type Digital Transistor (built-in resistors)

➤ Features

| VCC | VIN | IO | R1 | R2/R1 Typ. |
|-----|---------|-------|-------|------------|
| 50V | -5~+12V | 100mA | 2.2kΩ | 21 |

➤ Description

Built-in bias resistors enable the configuration of an inverter circuit without connecting external input resistors (see equivalent circuit).

The bias resistors consist of thin-film resistors with complete isolation to allow negative biasing of the input. They also have the advantage of almost completely eliminating parasitic effects. Only the on/off conditions need to be set for operation, making the device design easy.


➤ Applications

- Amplifying signal
- Electronic switch
- Oscillating circuit
- Variable resistance



➤ Ordering Information

| Device | Package | Shipping |
|------------|---------|-----------|
| SSCN123GS9 | SOT-723 | 8000/Reel |


➤ Pin configuration



SOT-723

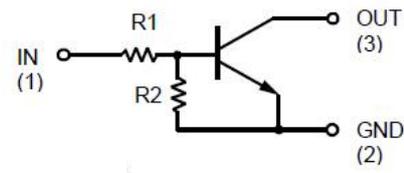

Circuit Diagram



Marking (Top View)



➤ **Absolute Maximum Ratings**($T_A=25^{\circ}\text{C}$ unless otherwise noted)







| Parameter | Symbol | Value | Unit |
|----------------------|-----------|------------|--------------------|
| Supply Voltage | V_{CC} | 50 | V |
| Input Voltage | V_{IN} | -5 to +12 | V |
| Output current | I_o | 100 | mA |
| Power Dissipation | P_D | 100 | mW |
| Junction Temperature | T_J | -55 to 150 | $^{\circ}\text{C}$ |
| Storage Temperature | T_{STG} | -55 to 150 | $^{\circ}\text{C}$ |

➤ **Electrical Characteristics** ($T_A=25^{\circ}\text{C}$ unless otherwise noted)

| Parameter | Symbol | Test Conditions | Min. | Typ. | Max. | Unit |
|----------------------|--------------|------------------------------------|------|------|------|------------|
| Input Voltage | $V_{I(off)}$ | $V_{CC} = 5V, I_o = 0.1mA$ | 0.5 | | | V |
| | $V_{I(on)}$ | $V_{CC} = 0.3V, I_o = 5mA$ | | | 1.1 | V |
| Output Voltage | $V_{O(on)}$ | $I_o/I_i = 5mA/0.25mA$ | | | 0.3 | V |
| Input Current | I_i | $V_i = 5V$ | | | 3.6 | mA |
| Output Current | $I_{O(off)}$ | $V_{CC} = 50V, V_i = 0V$ | | | 0.1 | uA |
| DC Current Gain | G_1 | $V_o = 5V, I_o = 10mA$ | 80 | | | |
| Input Resistance | R_1 | | 1.54 | 2.2 | 2.86 | K Ω |
| Resistance Ration | R_2/R_1 | | 17 | 21 | 26 | |
| Transition Frequency | f_T | $V_o = 10V, I_o = 5mA, f = 100MHz$ | | 250 | | MHz |




➤ Typical Performance Characteristics ($T_A=25^\circ\text{C}$ unless otherwise noted)

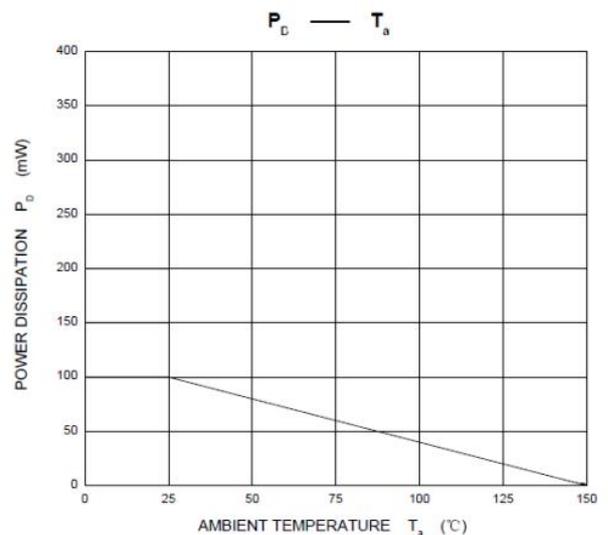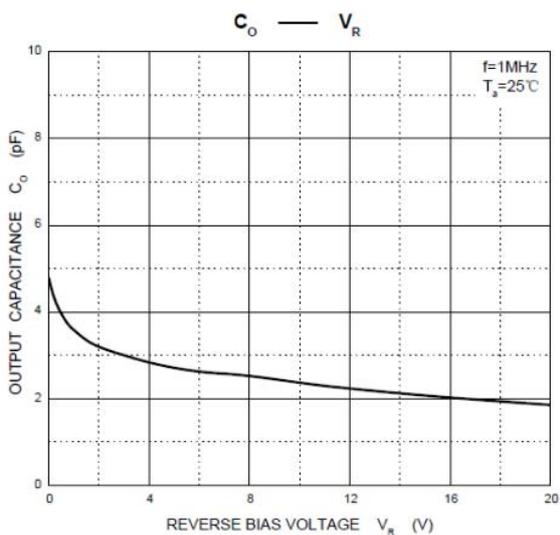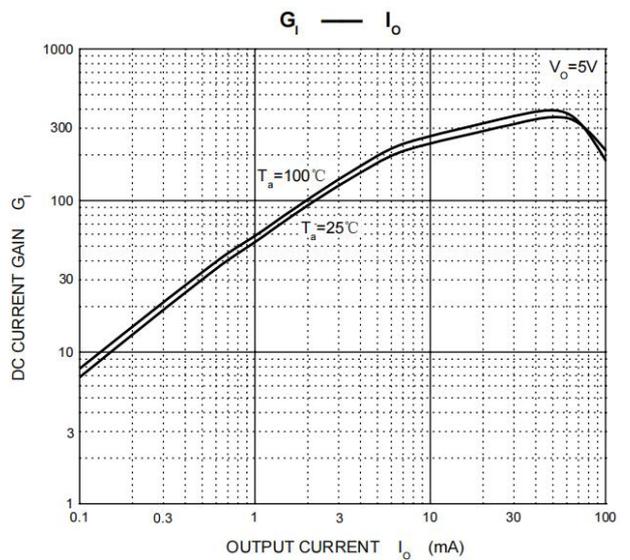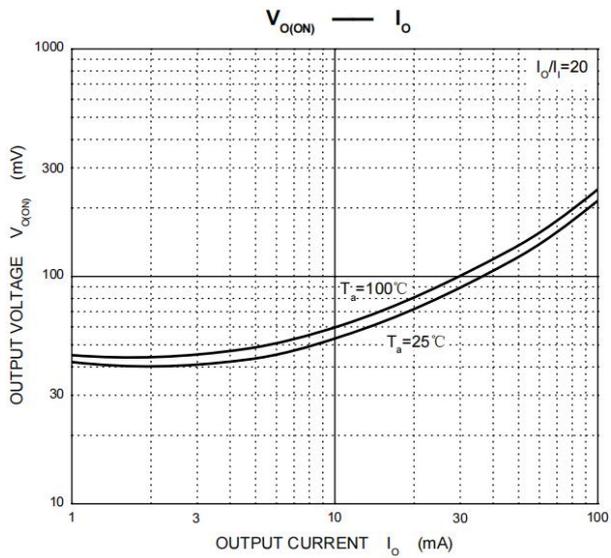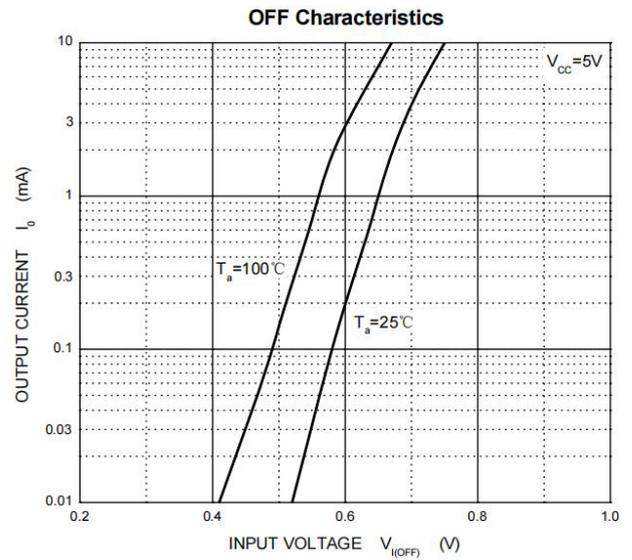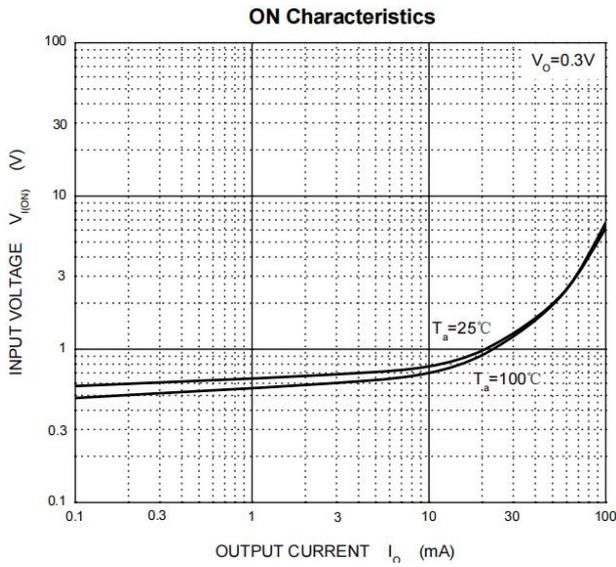


➤ **Package Information**

● **Mechanical Data**


SOT-723



TOP VIEW




SIDE VIEW



SIDE VIEW

| DIM | Millimeters | | |
|-----------|-------------|------|------|
| | Min. | Typ. | Max. |
| A | 0.43 | - | 0.55 |
| A1 | 0.00 | - | 0.05 |
| b1 | 0.27 | | 0.37 |
| b | 0.17 | - | 0.27 |
| c | 0.08 | 0.13 | 0.18 |
| D | 1.15 | 1.20 | 1.25 |
| E | 1.15 | 1.20 | 1.25 |
| E1 | 0.75 | 0.8 | 0.85 |
| e | 0.80Ref. | | |
| L1 | 0.15 | 0.2 | 0.25 |
| θ | 7°Ref. | | |

Recommended Pad outline

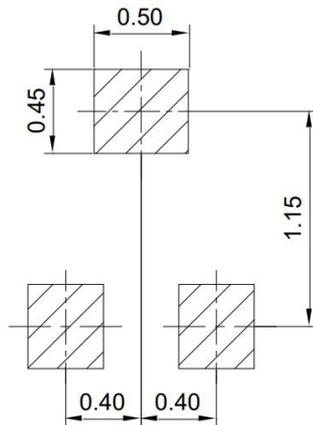

Unit : mm



DISCLAIMER

SSCSEMI RESERVES THE RIGHT TO MAKE CHANGES WITHOUT FURTHER NOTICE TO ANY PRODUCTS HEREIN TO IMPROVE RELIABILITY, FUNCTION OR DESIGN. SSCSEMI DOES NOT ASSUME ANY LIABILITY ARISING OUT OF THE APPLICATION OR USE OF ANY PRODUCT OR CIRCUIT DESCRIBED HEREIN; NEITHER DOES IT CONVEY ANY LICENCE UNDER ITS PATENT RIGHTS, NOR THE RIGHTS OF OTHERS.

THE GRAPHS PROVIDED IN THIS DOCUMENT ARE STATISTICAL SUMMARIES BASED ON A LIMITED NUMBER OF SAMPLES AND ARE PROVIDED FOR INFORMATIONAL PURPOSE ONLY. THE PERFORMANCE CHARACTERISTICS LISTED IN THEM ARE NOT TESTED OR GUARANTEED. IN SOME GRAPHS, THE DATA PRESENTED MAY BE OUTSIDE THE SPECIFIED OPERATING RANGE (E.G. OUTSIDE SPECIFIED POWER SUPPLY RANGE) AND THEREFORE OUTSIDE THE WARRANTED RANGE.

OUR PRODUCT SPECIFICATIONS ARE ONLY VALID IF OBTAINED THROUGH THE COMPANY'S OFFICIAL WEBSITE, CRM SYSTEM, OR OUR SALES PERSONNEL CHANNELS. IF CHANGES OR SPECIAL VERSIONS ARE INVOLVED, THEY MUST BE STAMPED WITH A QUALITY SEAL AND MARKED WITH A SPECIAL VERSION NUMBER TO BE VALID.